PROJECT PARTITION NOTES (SEE I-0.1 FOR GENERAL NOTES):

1. INSTALL ADDITIONAL GYPSUM BOARD WHERE EXTERIOR WALL CONDITIONS REQUIRE, SUCH AS UNDER WINDOW SILLS WHERE WALL CONSTRUCTION IS EXPOSED OR DEMOLISHED AS WELL AS ABOVE REMOVED CEILINGS AT NEW OPEN TO STRUCTURE AREAS. WHERE RETURNS OCCUR IN FRONT OF WINDOW AND ARE VISIBLE FROM EXTERIOR OF BUILDING, ENSURE A FINISHED WALL SURFACE AT MINIMUM TO BE PRIMED FOR A FINISHED LOOK IF TOO TIGHT TO WRAP WALL COVERING OR CANNOT BE PAINTED APPROPRIATELY.
2. CONTRACTOR TO PROVIDE 6" THICK CHASE WALL FOR PLUMBING IN BREAK ROOMS AND WELLNESS ROOMS, TYPICAL.
3. CONTRACTOR TO PROVIDE A LEVEL FIVE FINISH FOR WALLS TO RECEIVE A GRAPHIC WALL VINYL AND/OR WALLTALKER FINISHES. SEE FINISH PAGES FOR LOCATIONS AND SPECIFICATIONS. (I-4.0 THROUGH I-4.3)

KEYED PARTITION NOTES (SEE I-0.1 FOR GENERAL NOTES)

1. SPECIALTIES: SEMI RECESSED FIRE EXTINGUISHER : WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE BUILDING STANDARD SEMI-RECESSED FIRE EXTINGUISHER CABINET AND FIRE EXTINGUISHER. IF NO BUILDING STANDARD EXISTS, PROVIDE LARSEN #2409-6R CABINET, ROUGH OPENING DIMENSION 25" X 10 ½" X 4" WITH A 2½" PROJECTION. IF CABINET IS LOCATED IN A 1-HOUR RATED PARTITION, PROVIDE LARSEN #2409-R4 CABINET WITH "FIRE-SHIELD" OPTION, ROUGH OPENING DIMENSION 26 1/8" X 10 ½" X 4". AT ALL CABINETS, PROVIDE 10 LB., UL LISTED, MULTI PURPOSE DRY CHEMICAL FIRE EXTINGUISHER. REFER TO SHEET I-0.1 FOR CABINET MOUNTING HEIGHT INFORMATION. INSTALL EXTINGUISHERS WITHIN 3,000SF OR 75' OF TRAVEL.
2. APPLIANCE: BOTTOM FREEZER REFRIGERATOR: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE 26 CU. FT. BOTTOM FREEZER REFRIGERATOR WITH ICE IN BOTTOM DRAWER. INSTALL (1) ONE RIGHT HAND DOOR AND (1) ONE LEFT HAND DOOR WITH DOOR HANDLES ADJACENT TO EACH OTHER (REFER TO ELEVATIONS). PROVIDE CONNECTION AS REQ'D FOR A FULLY FUNCTIONAL INSTALLATION. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. SPEC: LG #LRDCS2603S, COLOR: STAINLESS, APPROXIMATE DIMENSIONS 69" H, X 35" D X 36.5"
3. APPLIANCE: ADA DISHWASHER: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE UNDER COUNTER ADA DISHWASHER WITH STAINLESS STEEL INTERIOR. PROVIDE CONNECTION AS REQUIRED FOR A FULLY FUNCTIONAL INSTALLATION. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. SPEC (ADA COMPLIANT): FRONT CONTROL SMART WI-FI ENABLED DISHWASHER WITH QUADWASH: LG #ADFD5448AT, COLOR: STAINLESS STEEL, APPROXIMATE DIMENSIONS 32 1/4" H, X 24" D X 24" W
4. APPLIANCE: ICE/WATER DISPENSER: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE COUNTERTOP ICE AND WATER DISPENSER. PROVIDE CONNECTION AS REQUIRED FOR A FULLY FUNCTIONAL INSTALLATION. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. SPEC: WWW.WEBSTAURANTSTORE.COM; SCOTSMAN #HID312AB-1 MERIDIAN COUNTERTOP AIR COOLED ICE MACHINE & WATER DISPENSER WITH PUSH BUTTON DISPENSING- 12 LB. BIN STORAGE, COLOR: STAINLESS STEEL, APPROXIMATE DIMENSIONS 35" HIGH, X 25" DEEP X 16 1/4" WIDE
5. APPLIANCE: MICROWAVE: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE COUNTER MICROWAVE. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. SPEC: 2.0 CU. FT. NEOCHEF COUNTERTOP MICROWAVE WITH SMART INVERTER AND EASYCLEAN; LG #LMC2075ST, COLOR: STAINLESS STEEL, APPROXIMATE DIMENSIONS 14" H, X 19" D X 24" W
6. APPLIANCE: COFFEE MAKER: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO INSTALL COFFEE MAKER PROVIDED BY ARAMARK. PROVIDE CONNECTION AS REQUIRED FOR A FULLY FUNCTIONAL INSTALLATION. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. SPEC: DE JONG DUKE VIRTU 9236 STANDARD PI COEX BEAN2CUP 3 COFFEE'S; APPROXIMATE DIMENSIONS 34.3" H, X 21.1" D X 16.9" W; WWW.DEJONGDUKE.US; 734.403.1708
7. APPLIANCE: UNDERCOUNTER REFRIGERATOR: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE ADA COMPLIANT UNDERCOUNTER REFRIGERATOR. PROVIDE CONNECTION AS REQUIRED FOR A FULLY FUNCTIONAL INSTALLATION. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. SPEC: DANBY 2.6 CU.FT CONTEMPORARY CLASSIC COMPACT REFRIGERATOR #DAR026A2BDB; FINISH: BLACK APPROXIMATE DIMENSIONS 27" H, X 20" D X 18" W; WWW.DANBY.COM
8. CUP DISPENSER CABINET: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE COUNTERTOP CUP DISPENSER CABINET. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. SPEC: SAN JAMAR C2854 SENTRY STAINLESS STEEL 4-SLOT VERTICAL 8-44 OZ COUNTERTOP CUP DISPENSER CABINET ITEM #: 712C2854SS; MFR: C2854; APPROXIMATE DIMENSIONS 30" H, X 58" D X 8" W; WWW.WEBSTAURANTSTORE.COM
9. PHONE BOOTH: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO INSTALL LANDLORD PROVIDED PHONE BOOTH. REFER TO ELECTRICAL PLANS FOR POWER/DATA. COORDINATE WITH CONSTRUCTION MANAGER AND FURNITURE VENDOR. SPEC: VARI PRIVACY BOOTH
10. TELEVISION BLOCKING: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE FIRE RETARDANT BLOCKING IN PARTITION FOR AV VENDOR SUPPLIED TELEVISION MONITOR AND MOUNT. CENTERLINE OF MONITORS TO BE MOUNTED APPROXIMATELY 60" AFF IN SMALL HUDDLES AND 72" IN LARGE CONFERENCES AND ALL OTHER LOCATIONS. ALL OFFICES ARE FUTURE TENANT PROVIDED TVS AND MOUNTS. REFER TO OUTLET LOCATIONS ON I-2.0 FOR BLOCKING LOCATIONS.
11. PHONE BOARD BLOCKING: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE FIRE RETARDANT BLOCKING IN PARTITION FOR WALL MOUNTED FIRE RATED PLYWOOD BACKBOARDS FOR IT AND COMMUNICATION EQUIPMENT. SEE ELECTRICAL PLAN ON SHEET I-2.0 FOR MORE INFORMATION.
12. MILLWORK BLOCKING: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE FIRE RETARDANT WOOD BLOCKING IN PARTITION FOR WALL MOUNTED SHELVING AND CABINETRY.
13. PIEDMONT PLUG: WHERE A PARTITION ABUTS A MULLION, CONTRACTOR TO PROVIDE PIEDMONT PLUG. SEE DETAIL ON I-0.2 FOR MORE INFORMATION.
14. WINDOW SHADES: WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE FIRE RETARDANT WOOD BLOCKING IN PARTITION ABOVE WINDOW GLAZING FOR MOTORIZED AND MANUALLY DRAWN WINDOW SHADES PER MANUFACTURER'S INSTALLATION INSTRUCTIONS. SPEC: MECHO: MECHO/5 MANUAL COMMERCIAL SOLAR SHADE SYSTEM; SOLAR SHADE CLOTH MATERIAL: EUROTWILL 6450 SERIES; COLOR: BLACK-6469; 3% OPENNESS FACTOR; FIRE CLASSIFICATION: NFPA 701-2015; 75% PVC AND 25% POLYESTER; CONTACT: WWW.MECHOSHADE.COM

PLUMBING NOTES (SEE I-0.1 FOR GENERAL NOTES):

P1 SINGLE-BOWL BREAK ROOM SINK
WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE HANDICAP ACCESSIBLE SINK AND FAUCET. PROVIDE CONNECTION AS REQUIRED FOR A FULLY FUNCTIONAL INSTALLATION. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. IF THIS MODEL NUMBER HAS CHANGED OR IS DISCONTINUED, SUBMIT ELKAY'S AND MOEN'S RECOMMENDED NEW EQUIVALENT MODEL FOR DESIGN'S REVIEW.
SINK SPEC: ELKAY-GOURMET (LUSTERTONE®) STAINLESS STEEL SINGLE BOWL UNDERMOUNT PERFECT DRAIN SINK #ELUHAD281645PD PDI (18 GAUGE) 31"W X 22"D X 6-1/2"H PROVIDE ONE FAUCET HOLE AND PERFECT DRAIN. SOURCE: ELKAY MANUFACTURING COMPANY TEL 630.574.8484 WEB: WWW.ELKAY.COM
FAUCET SPEC: MOEN- SLEEK SPOT RESIST STAINLESS ONE-HANDLE HIGH ARC PULL DOWN KITCHEN FAUCET. #7864 FINISH: TBD. SOURCE: MOEN, 1.800.BUY.MOEN; WWW.MOEN.COM

P2 SINGLE-BOWL WELLNESS & ISLAND SINK
WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE SINK AND FAUCET. PROVIDE CONNECTION AS REQUIRED FOR A FULLY FUNCTIONAL INSTALLATION. SUBMIT CUT SHEETS FOR DESIGNER'S REVIEW PRIOR TO ORDERING. IF THIS MODEL NUMBER HAS CHANGED OR IS DISCONTINUED, SUBMIT ELKAY'S & MOEN'S RECOMMENDED NEW EQUIVALENT MODEL FOR DESIGN'S REVIEW.
SINK SPEC: ELKAY-GOURMET (LUSTERTONE®) CLASSIC STAINLESS STEEL SINGLE BOWL UNDERMOUNT ADA SINK W/ PERFECT DRAIN #ELUHAD161655PD (18 GAUGE) 18.5"W X 18.5"D X 5-3/8"H PROVIDE ONE FAUCET HOLE AND PERFECT DRAIN. SOURCE: ELKAY MANUFACTURING COMPANY TEL: 630.574.8484 WEB: WWW.ELKAY.COM
FAUCET SPEC: MOEN- SLEEK SPOT RESIST STAINLESS ONE-HANDLE HIGH ARC PULL DOWN KITCHEN FAUCET. #7864 FINISH: TBD. SOURCE: MOEN, 1.800.BUY.MOEN; WWW.MOEN.COM

P3 WATERLINES & DRAINS
WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE COPPER BRAIDED WATER LINES TO REFRIGERATORS, DISHWASHERS, COFFEE MAKERS AND ICE/WATER DISPENSERS (PLASTIC LINES WILL NOT BE ACCEPTED). CONTRACTOR TO PROVIDE HOT/COLD WATER LINES TO ALL SINKS. CONTRACTOR TO PROVIDE DRAINS TO NECESSARY EQUIPMENT. REFER TO PLUMBING DRAWINGS.

P4 INSULATION BOOTS
THROUGHOUT EXTENT OF WORK, CONTRACTOR TO PROVIDE INSULATION BOOT ON P-TRAP BELOW AS REQUIRED TO MEET 2010 ADA CODES AT ALL SINKS. REFER TO PLUMBING DRAWINGS.

P5 SHUT OFF VALVES
THROUGHOUT EXTENT OF WORK, CONTRACTOR TO PROVIDE SHUT-OFF VALVES AT ALL WATER LINES TO EQUIPMENT. REFER TO PLUMBING DRAWINGS.

P6 JANITOR'S MOP SINK/FAUCET AND WATER HEATER
CONTRACTOR TO FURNISH AND INSTALL MOP SINK, FAUCET AND HOT/COLD WATER LINES (COPPER BRAIDED LINES) AND DRAINS FOR A FULLY FUNCTIONAL INSTALLATION. PROVIDE HOT WATER HEATER AS SPECIFIED ON PLUMBING DRAWINGS.

KEYED ALTERNATE PARTITION NOTES:

A.1 ENTRY VESTIBULE
WHERE INDICATED ON THE DRAWINGS, CONTRACTOR TO PROVIDE ALTERNATE PRICE TO FURNISH AND INSTALL NEW ENTRY VESTIBULE GLASS PARTITION WITH ENTRY DOORS AS SHOWN, REFER TO DOOR AND WINDOW SCHEDULES AND ELEVATIONS ON SHEET I-0.2 FOR MORE INFORMATION.

PARTITION TYPE LEGEND

E-1	EXISTING BUILDING STANDARD PARTITIONS TO REMAIN
E-R	EXISTING BUILDING STANDARD PARTITION TO BE REMOVED
P-1	NEW BUILDING STANDARD CEILING HEIGHT PARTITION - SEE DRAWINGS FOR HEIGHT AT O.T.S. AREAS
P-2	NEW BUILDING STANDARD FULL HEIGHT PARTITION
P-3	NEW LOW WALL PARTITION UNDER MILLWORK - SEE I-0.2 FOR DETAIL
P-4	NEW LOW WALL PARTITION AT LOUNGE SEATING - 44" HEIGHT

PARTITION LEGEND

FEC	SEMI-RECESSED BUILDING STANDARD FIRE EXTINGUISHER CABINET - SEE KEY NOTE #1
X'-X"	PARTITION HEIGHT INDICATION
	COLD/ HOT WATER LINE
D-1	DOOR SYMBOL - SEE (I-0.2) FOR DOOR SPECIFICATIONS AND ADA REQUIREMENTS
W-1	WINDOW SYMBOL - SEE (I-0.2) FOR WINDOW SPECIFICATIONS
#	KEYNOTE SYMBOL
CR	MAG LOCK CARD READER LOCATIONS, SEE I-0.2 AND I-2.0 FOR ADDITIONAL INFORMATION

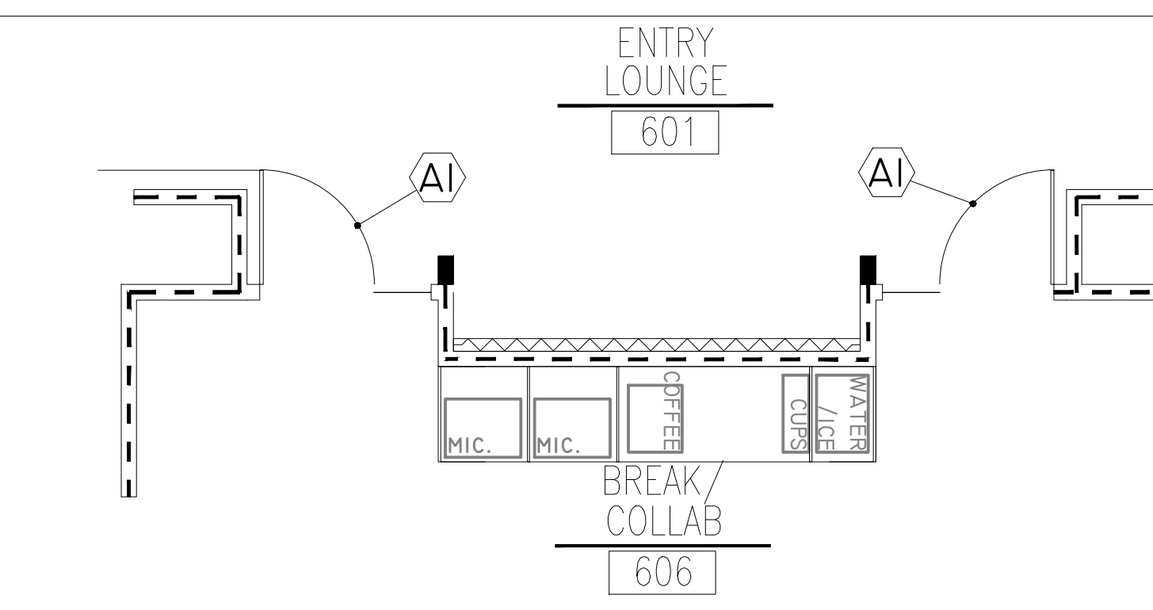

2 | 1 I.1 ALTERNATE PARTITION PLAN
SCALE : 1/8" = 1'-0"

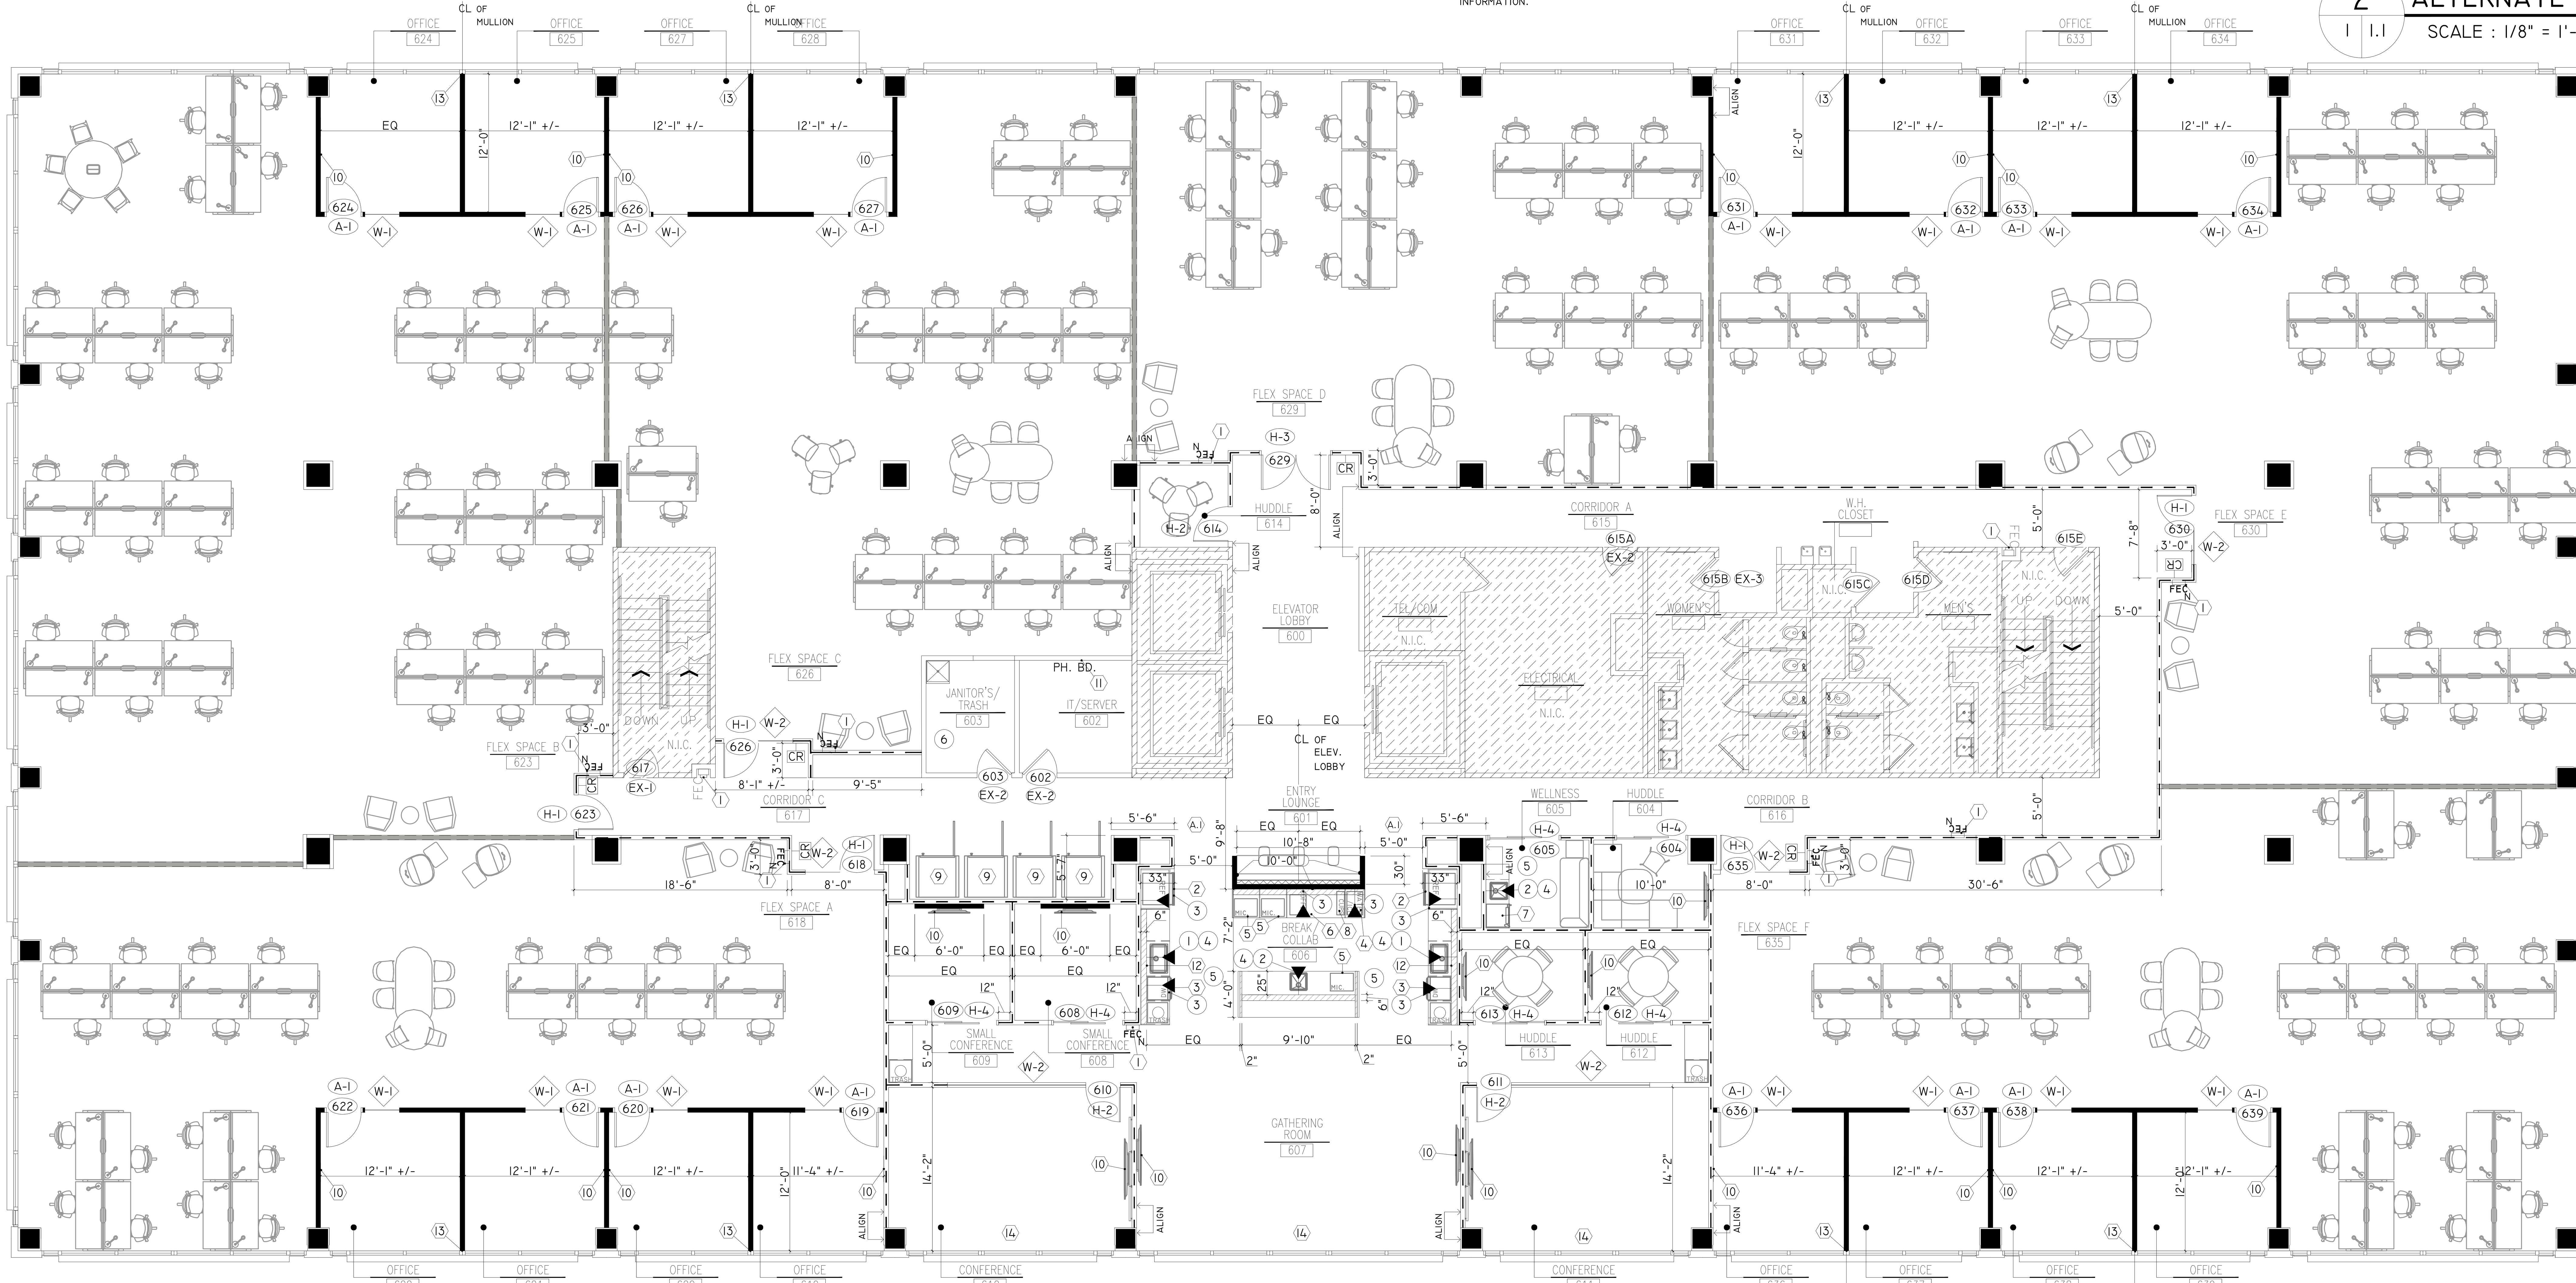

1 | 1 I.1 PARTITION PLAN
SCALE : 1/8" = 1'-0"

PLAN N

RELEASED FOR CONSTRUCTION

DANA LYNN ANDERSON
STATE OF GEORGIA
ID000454
GEORGIA REGISTERED INTERIOR DESIGNER

PLANNING INTERIORS INC
6000 LAKE FORREST DR NW, SUITE 120
ATLANTA, GA 30328
PH 678.732.3946

FLEX FLOOR
6120 POWERS FERRY RD. NW
6TH FLOOR, SUITE 600
ATLANTA, GA 30339

REV:	DATE:	DESCRIPTION:
	02.16.21	ISSUED FOR CONSTRUCTION

JOB NO: 20338
DRAWN BY: BH/JN
REVIEWED BY: DA/SH
USF: 21,240

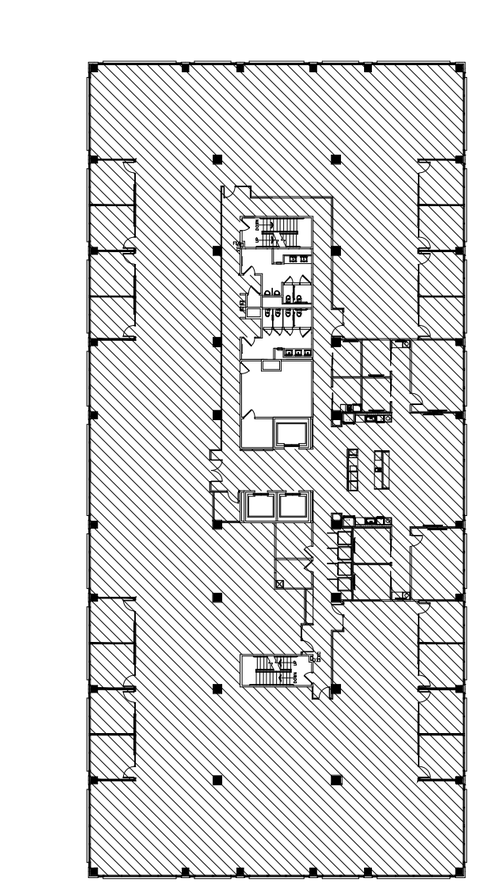

KEY PLAN

I-1.1

SHEET NO: 5 OF: 14